

VALKYRIE

LED LINEAR PENDANT



4000K
Colour Temperature



5 Year
Warranty





UGR19

FEATURES

- Attractive linear extruded aluminium body
- Low glare - UGR19
- Long >54,000 hours life
- Soft uplighting for increased visual comfort
- White and black colour options

Distribution:

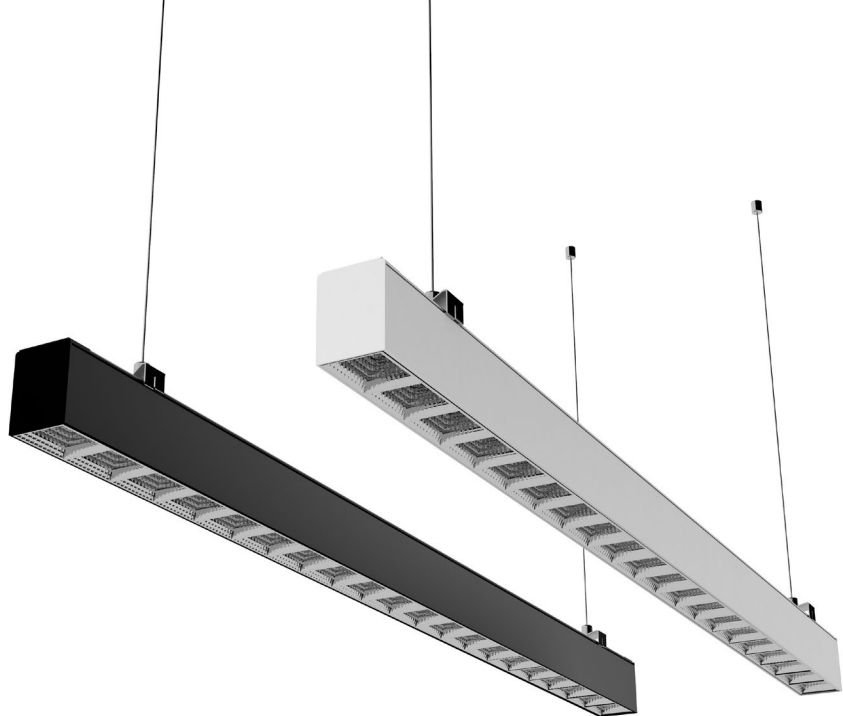

CODE	POWER	LUMEN OUTPUT	EFFICACY	COLOUR	STOCKED
VAL1200-45-840-B-DI	45W	5,000lm	111lm/W	BLACK	YES
VAL1200-45-840-W-DI	45W	5,000lm	111lm/W	WHITE	YES

LIGHTING DATA

LIGHT SOURCE	Samsung SMD LED
LIFETIME @L70	>54,000hrs
CCT	4000K (CW)
CRI	83
UGR RATING	19
BEAM ANGLE	85°x85° (down) / 120° (up)
DISTRIBUTION	70%(down) / 30%(up)

ELECTRICAL DATA

POWER SUPPLY	Boke LED Driver
MAINS VOLTAGE	AC200-240V / 50-60 Hz
POWER FACTOR	>0.95
FLICKER FREE	YES
CONNECTION	1.5m 3 core cable
DIMMABLE OPTIONS	1-10V, DALI, DSI, SwitchDim

DESIGN / CONSTRUCTION

BODY MATERIAL	Aluminium
FINISH	Electrostatic Thermo Painted
MOUNTING OPTIONS	Suspended
SUSPENSION KIT	1.5m


TECHNICAL DATA

IP RATING	IP20
PROTECTION CLASS	Class 1
DOCUMENTATION	SAA
WARRANTY	5 Year product replacement


VALKYRIE

LED LINEAR PENDANT

PHOTOS

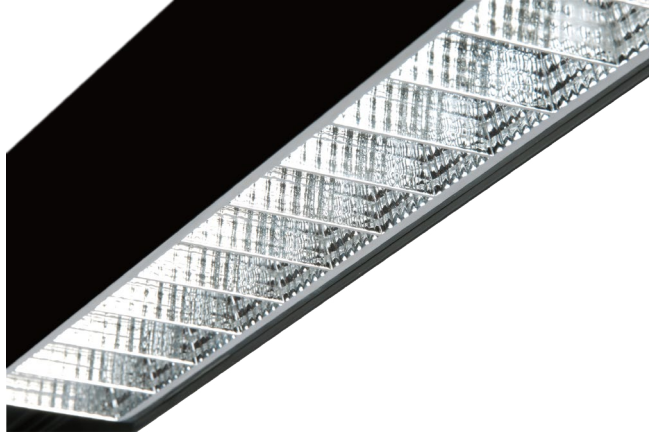

PHOTOMETRIC DIAGRAMS

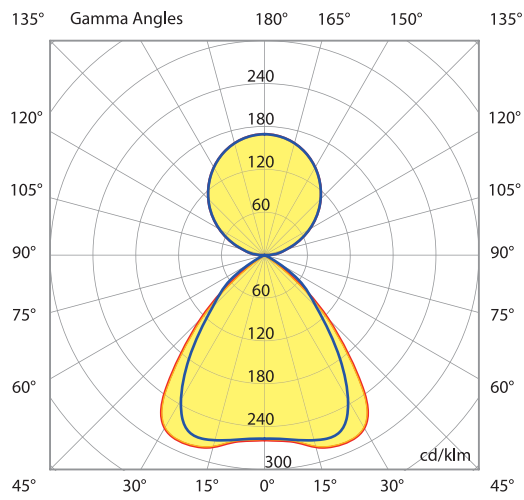

DIMENSIONS

